

Construction Site Runoff Control

THE UNIVERSITY OF ALABAMA®

Construction Site Runoff




 On February 1, 2011, Alabama Department of Environmental Management (ADEM) issued Phase 2 of The University of Alabama National Pollutant Discharge Elimination System (NPDES) stormwater discharge permit.



Construction Site Runoff

- As part of the UA discharge permit, EHS has developed a stormwater management plan which is composed of 6 elements.
 - Construction site runoff control is one of the six minimum control measures.

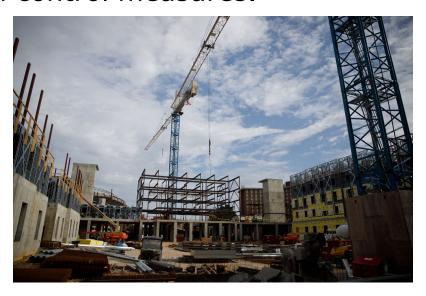

Best Management Practices

- The Best Management Practices (BMPs) for the construction site runoff control measure are:
 - Plan Reviews
 - Education
 - Construction Site Inspections
 - Problem Reporting



Plan Reviews

Construction
Administration will
review construction
plans to ensure they
contain sediment and
erosion control plans
and conformance to
stormwater guidelines.



Education

 Training will be provided to UA project managers and construction site supervisors regarding site management, inspections, and how to report discharges.





Construction Site Inspections


- Construction site inspection procedures for project managers and site supervisors have been developed by Construction Administration.
- Contractors will perform daily self-inspections and take immediate action when noncompliance conditions are observed.





Site Inspections

- UA Project Engineers will perform inspections of construction sites and undertake corrective action as required.
- Inspection results are reported to Construction Administration.
- Individuals observing problems connected with construction sites may report the issue to EHS at 205-348-5905 or Construction Administration at 205-348-5950.

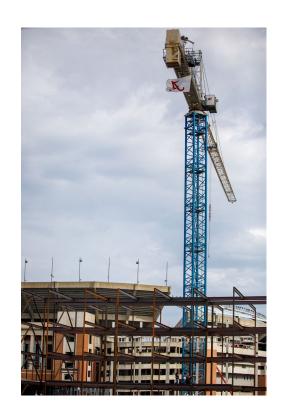

Site Management

 There are two main best management practices that may be utilized for control of stormwater at construction sites:

- Stabilization Practices
- Structural Practices



Stabilization Practices

- Stabilization practices help prevent erosion that contribute sediment to stormwater
- Typical Stabilization Practices
 - Seeding
 - Mulching
 - Sod Stabilization
 - Vegetation Buffer Strips
 - Protection of Trees
 - Preservation of Mature Vegetation
 - Decreasing Slope Angles or Lengths



Structural Practices

- Structural practices divert flow from exposed soils, stores flow, or limit runoff and the discharge of pollutants from exposed areas of the site. Typical structural practices can include:
 - Silt Fences
 - Earth Dikes
 - Drainage Swales
 - Sediment Traps
 - Check Dams
 - Subsurface Drains
 - Storm Drain Inlet Protection
 - Soil Retaining Systems
 - Sediment Basins



Annual Report

 Information related to the construction site runoff minimum control measure will be included in the annual report.





Environmental Health & Safety

 For any concerns, questions, or comments regarding stormwater, contact Environmental Health & Safety (EHS) at 205-348-5905.